
-GENESIS-

New York City Certified Fire Alarm Cable

Delivering Peace of Mind

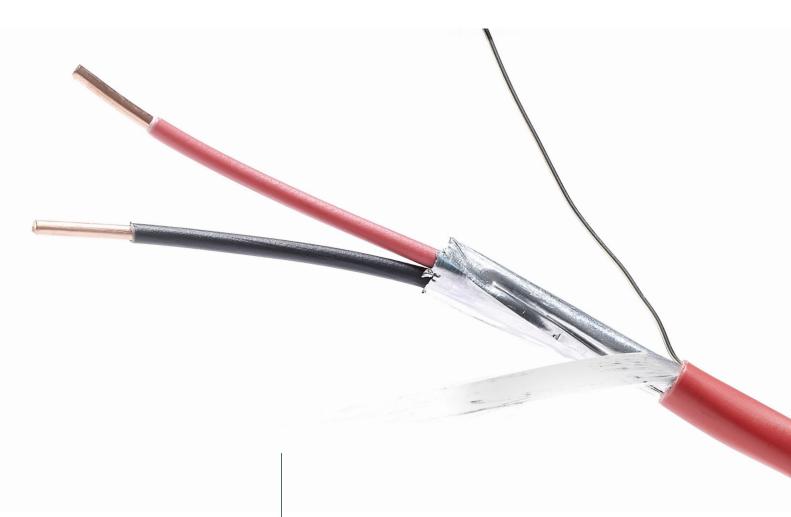

Ensure System Reliability

Genesis' NYC Certified Fire Alarm Cable drives continuous high performance for today's strict fire & life safety installations.

NYC Certified Cable Applications & Features

Genesis' NYC Certified Fire Alarm Cable is designed to meet New York City's rigorous cable requirements, ensuring system reliability for applications that demand absolute certainty of critical system performance. Its twisted pairs mitigate exterior interference and while it's designed to meet strict New York City standards, NYC Certified Cable can be used in other critical environments that demand reassurance of connectivity, performance and safety.



NYC Certified Fire Alarm Cable Options

| AWG | Number of Pairs | Stranding | Shield | DC Resistance (Ohms/1000') | Nominal Capacitance (pF/ft.) | Nominal Outer Diameter (Inches) | Average Weight (Pounds/1000') | Part Number |
|--|--------------------|-----------|------------|----------------------------------|------------------------------------|--|-------------------------------------|----------------|
| New York Certified and UL Listed FPLP 150 °C | | | | | | | | |
| 16 | 1 pair | Solid | Unshielded | 4.1 | 54.2 | 0.214 | 33.1 | 5502 |
| 16 | 2 pairs | Solid | Unshielded | 4.1 | 54.2 | 0.280 | 58.0 | 5503 |
| 16 | 1 pair | Solid | Shielded | 4.1 | 91.7 | 0.218 | 35.1 | 5552 |
| 16 | 2 pairs | Solid | Shielded | 4.1 | 81.6 | 0.250 | 59.2 | 5553 |
| 14 | 1 pair | Solid | Unshielded | 2.57 | 59.7 | 0.244 | 45.2 | 5504 |
| 14 | 2 pairs | Solid | Unshielded | 2.57 | 59.7 | 0.290 | 79.6 | 5506 |
| 14 | 1 pair | Solid | Shielded | 2.57 | 104.4 | 0.248 | 47.3 | 5554 |
| 14 | 2 pairs | Solid | Shielded | 2.57 | 91.5 | 0.290 | 81.7 | 5555 |
| 12 | 1 pair | Solid | Unshielded | 1.62 | 65.3 | 0.272 | 63.7 | 5505 |

Genesis Cable

7701 95th Street Pleasant Prairie, WI 53158 Office: 800.222.0060 www.genesiscable.com

